





## Phoenix T10R Series Reverse Tine Tillers 5 Heavy Duty Gear Drive Models from 44 to 74 Inches

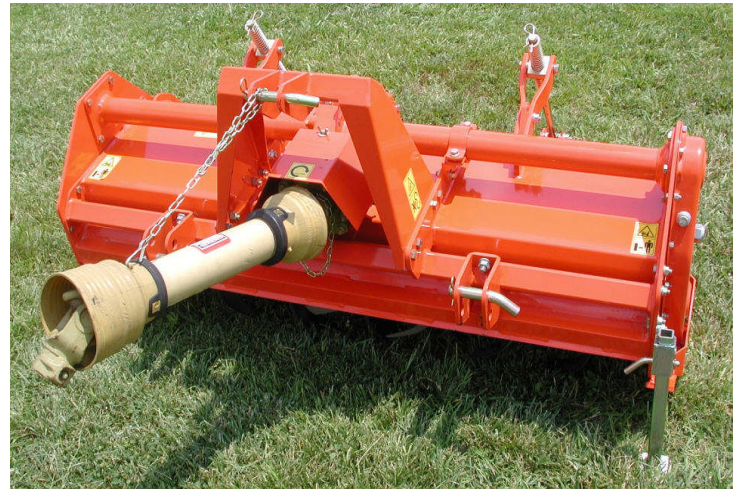

The reverse rotation of our tiller tines forces the tiller down into the ground for deep smooth cultivation while bringing debris up over the top of the rotor. This unique action deposits larger debris first then covers it with finely pulverized soil particles for a smoother, cleaner finish. Get the final results you need in one pass!

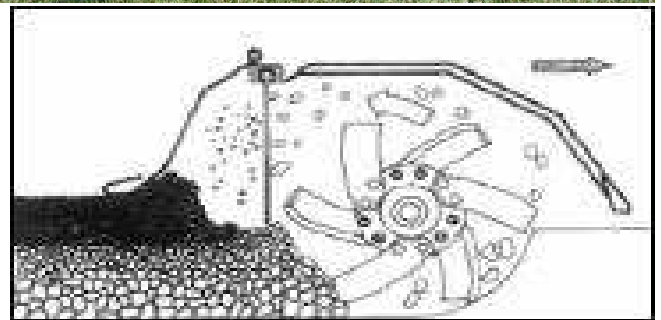

### Standard Features Include:

- Series 5 PTO W/ Slip Clutch by Eurocardan
- 6 Tines Per Flange
- Heavy Duty Down Pressure Springs On Drag Board
- Sliding/Adjustable Lower Hitch Blocks
- Heavy Duty Gear Drive Transmission
- Heavy Duty Adjustable Skids with Aprons for Quick Depth Adjustment

Specifications	T10R-44GE	T10R-50GE	T10R-58GE	T10R-66GE	T10R-74GE
Working Width (Inches)	44	50	58	66	74
Working Depth (Inches)	7	7	7	7	7
Blades per Flange	6	6	6	6	6
Total Blades	30	36	42	48	54
Side Drive	Gear	Gear	Gear	Gear	Gear
Driveline Protection	Slip Clutch	Slip Clutch	Slip Clutch	Slip Clutch	Slip Clutch
Hitch	Cat 1	Cat 1	Cat 1	Cat 1	Cat 1
PTO Shaft Series	5	5	5	5	5
PTO Power Requirement (HP)	35-55	35-55	35-55	35-55	35-55
Optimum PTO Speed (RPM)	540	540	540	540	540
Rotor Flange Diameter (Inches)	6.3	6.3	6.3	6.3	6.3
Rotor Flange Thickness (Inches)	0.5	0.5	0.5	0.5	0.5
Approximate Weight W/PTO (LBS)	646	657	712	745	789