




T25 Series Rotary Tillers

Heavy Duty Tillers from 80 to 100 Inches (60-90 HP)

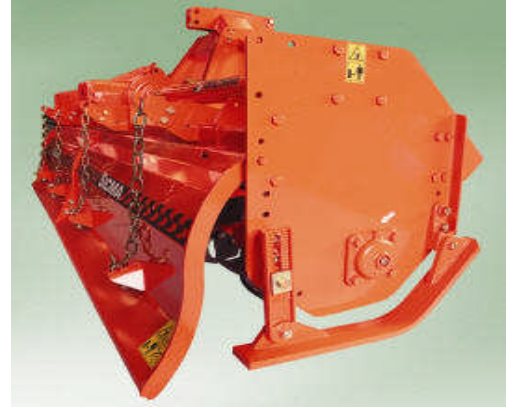

The T25 Series Heavy Duty Gear Drive Tillers feature a 3 speed gearbox with selector lever that allows you to set your tiller speed to match field conditions. The load bearing frame on which the gearbox and super heavy duty protective hood are mounted make this machine extremely sturdy for even the most demanding applications. All Phoenix line tillers are specially designed to reduce the possibility of clogging even in wet or sticky soil conditions.

Standard Features Include:

- Series 8 PTO Clutch With 4 Plate Slip Clutch by Eurocardan
- 6 Heavy Duty Tines Per Flange
- 3 Speed Gearbox W/ Shift Lever
- Gear Drive Transmission in Oil Bath
- Double Torque Tube
- Adjustable Upper and Lower Hitch Points.



Specifications	T25-80GE	T25-92GE	T25-100GE
Working Width (In.)	80	92	100
Working Depth (In.)	7	7	7
Blades / Flange	6	6	6
Total Blades	48	54	60
Side Drive	Gear	Gear	Gear
Driveline Protection	Slip Clutch	Slip Clutch	Slip Clutch
Hitch	Cat II & III	Cat II & III	Cat II & III
PTO Shaft Series	8	8	8
PTO Power Required (HP)	60-90	60-90	60-90
Optimum PTO Speed(RPM)	540	540	540
Rotor Flange Diameter (In.)	6.3	6.3	6.3
Rotor Flange Thickness (In.)	0.6	0.6	0.6
Approximate Weight W/PTO (LBS)	1341	1396	1451
Standard Stack Quantity (Packaging)	3	3	3
Rotor Speeds (Gearbox selectable)	4+2	4+2	4+2